



## TECHNICAL DATA

# Divinycell H

### HIGH PERFORMANCE PVC CORE MATERIAL

Divinycell H provides excellent mechanical properties to low weight. The unique PVC chemical structure, yields impressive mechanical performance to a low weight. Divinycell H has been widely used and has a proven track record in virtually every application area where sandwich composites are employed including the marine (leisure, military and commercial), land transportation, wind energy, civil engineering/infrastructure and general industrial markets.

Divinycell H is ideal for applications subject to fatigue, slamming or impact loads. Other key features of Divinycell H include consistent high quality, excellent adhesion/peel strength, excellent chemical resistance, low water absorption and good thermal/acoustic insulation. Divinycell H is compatible with virtually all commonly used resin and manufacturing systems.

Divinycell PVC foams also feature very low resin uptake, enabling weight and cost saving.

### MECHANICAL PROPERTIES

Property	Test Procedure	Unit		H45	H60	H80	H100	H130	H160	H200	H250
Compressive Strength <sup>1</sup>	ASTM D1621	MPa	Nominal	0.6	0.9	1.4	2.0	3.0	3.4	5.4	7.2
			Minimum	0.5	0.7	1.15	1.65	2.4	2.8	4.5	6.1
Compressive Modulus <sup>1</sup>	ASTM D1621-B-73	MPa	Nominal	50	70	90	135	170	200	310	400
			Minimum	45	60	80	115	145	175	265	350
Tensile Strength <sup>1</sup>	ASTM D1623	MPa	Nominal	1.4	1.8	2.5	3.5	4.8	5.4	7.1	9.2
			Minimum	1.1	1.5	2.2	2.5	3.5	4.0	6.3	8.0
Tensile Modulus <sup>1</sup>	ASTM D1623	MPa	Nominal	55	75	95	130	175	205	250	320
			Minimum	45	57	85	105	135	160	210	260
Shear Strength	ASTM C 273	MPa	Nominal	0.56	0.76	1.15	1.6	2.2	2.6	3.5	4.5
			Minimum	0.46	0.63	0.95	1.4	1.9	2.2	3.2	3.9
Shear Modulus	ASTM C 273	MPa	Nominal	15	20	27	35	50	60	73	97
			Minimum	12	16	23	28	40	50	65	81
Shear Strain	ASTM C 273	%	Nominal	12	20	30	40	40	40	45	45
Density	ISO 845	kg/m <sup>3</sup>	Nominal	48	60	80	100	130	160	200	250

All values measured at +23°C


1. Properties measured perpendicular to the plane.

Nominal value is an average value of a mechanical property at nominal density.

Minimum value is a minimum guaranteed mechanical property a material has independently of density.

### PRODUCT CHARACTERISTICS

- Low water absorption
- Superior damage tolerance
- Fast and easy to process
- Good chemical resistance
- Excellent fatigue properties
- Low resin uptake
- Wide range of properties
- Provides excellent mechanical properties to a low weight
- Good temperature resistance

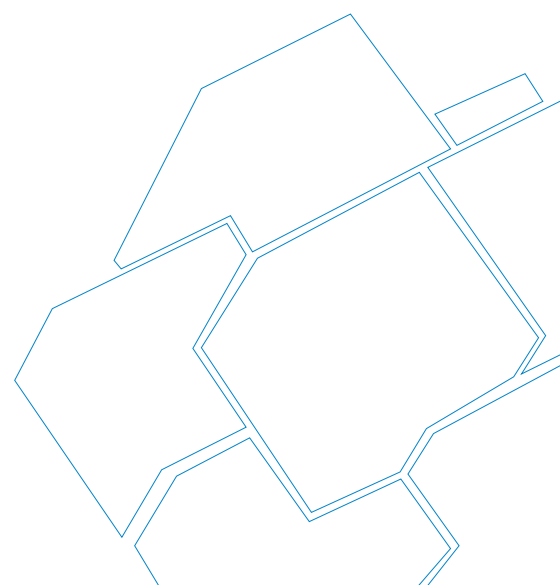

## TECHNICAL CHARACTERISTICS

Characteristics <sup>1</sup>	Unit	H45	H60	H80	H100	H130	H160	H200	H250	Test method
Density variation	%	+15/-10%	+15/-10%	+9/-16%	+15/-10%	+15/-10%	+15/-10%	+15/-10%	+16/-10%	-
Thermal conductivity <sup>2</sup>	W/(m-K)	0.028	0.029	0.031	0.033	0.036	0.040	0.044	0.049	EN 12667
Coeff, linear heat expansion	x10 <sup>-6</sup> /°C	40	40	40	40	40	40	40	40	ISO 4897
Heat Distortion Temperature	°C	+125	+125	+125	+125	+125	+125	+125	+125	DIN 53424
Continuous temp range	°C	-200/+70	-200/+70	-200/+70	-200/+70	-200/+70	-200/+70	-200/+70	-200/+70	-
Max process temp	°C	+90	+90	+90	+110	+110	+110	+110	+110	-
Dissipation factor	-	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012	0.0015	0.0019	ASTM D 2520
Dielectric constant	-	1.05	1.06	1.09	1.11	1.15	1.18	1.23	1.29	ASTM D 2520
Poissons ratio <sup>3</sup>	-	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	D638-08

1. Typical values
2. Thermal conductivity at +20°C
3. Standard deviation is 0.045

The foam can be used in sandwich structures, for outdoor exposure, with external skin temperatures up to +85°C. Maximum processing temperature is dependent on time, pressure, and process conditions. To confirm that Divinycell H is compatible with users particular processing parameters and for optimal design of applications used in high operating temperatures in combination with continuous load, please contact Diab Technical Services.

## DIMENSIONS

Format		Unit	H45	H60	H80	H100	H130	H160	H200	H250
Plain sheets	Length	mm	2440	2440	2440	2160	1960	1860	1730	1640
	Width	mm	1220	1220	1220	1070	970	915	850	800
GS sheet	Length	mm	1220	1220	1220	1080	980	930	865	-
	Width	mm	813	813	813	1070	970	915	850	-
GS sheet	Length	mm	1220	1220	1220	-	-	-	-	-
	Width	mm	1220	1220	1220	-	-	-	-	-

Tolerances	Unit	Length	Width	Thickness
Plain sheets	mm	-10/+6	-5/+6	-/+ 0.5

## STORAGE OF PRODUCT

The shelf life of Divinycell is unlimited when it is stored in its original package on ambient indoor storage conditions and protected against UV exposure.

### Divinycell H is type approved by:



#### Disclaimer:

This data sheet may be subject to revision and changes due to development and changes of the material. The data is derived from tests and experience. If not stated as minimum values, the data is average data and should be treated as such. Calculations should be verified by actual tests. The data is furnished without liability for the company and does not constitute a warranty or representation in respect of the material or its use. The company reserves the right to release new data sheets in replacement.

All content in this publication is protected by international copyright laws. Copyright © Diab November 2024.

### Diab Group

Drottninggatan 7, 5th floor  
SE-252 21 Helsingborg, Sweden  
Tel +46 (0) 430 163 00  
E-mail: info@diabgroup.com